

Specifications

ZETOR FORTERRA 135

ENGINE	Zetor 4-cyl. turbocharged diesel; Water cooled; wet sleeves; 4 valves per cylinder; air-to-air intercooling; mechanical inline injection pump	
Engine capacity	254 cu.in	
Maximum engine horsepower	135	
Rated engine speed	2,200 rpm	
PTO horsepower	116	
Torque rise	47%	
Cold weather starting system	Glow plug in each cylinder	
Fuel tank capacity	48 gal.	
CLUTCH	Dry, 14" dia., cerametallic	
TRANSMISSION	Fully synchronized with synchro-shuttle and 3-speed power shift	
Forward/reverse gears	24/18	
P.T.O. SHAFT	Independent, 540/1000 rpm	
Ground Speed P.T.O.	Standard	
BRAKES	Wet disc brake	
HYDRAULIC SYSTEM	Open center; Electronic control with AHC (Adaptive Hitch control)	
Flow @ pressure at remotes	19 gpm @ 2,700 psi	
Total hydraulic flow	27 gpm	
Three point hitch	Category II	
Function	Position, draft, mixed, AHC	
Lifting force @ end of lower links	10,800 lbs.	
Standard remote outlets	3 sets	
STANDARD TIRES	Front 14.9R-24; Rear 520/70R-38	
MAIN DIMENSIONS:	Length	170 in.
	Width	87 in.
	Height	109 in.
	Ground clearance without hitch	19 in.
WHEELTRACK:	Front	67.5-80 in.
	Rear	62-71 in.
Turning radius (w/o brakes)		12.3 ft.
WEIGHT, w/o weights		10,015 lbs.

STANDARD EQUIPMENT:

Power rear differential lock and front wheel drive engagement; Limited slip front differential; Ground speed PTO; Telescopic sway bars with fine adjustment; Telescopic lower links or lower links with hooks; Deluxe seat with with air suspension, multiple adjustment, and arm rests; Tilt and telescoping steering wheel; Tinted windows; Front and rear wipers; Windshield washer; Heated rear window; Heated rear view mirrors; Roller sun blind; Sun roof; Multi-function digital display dashboard; Front fenders; Three sets of remote outlets (one set with detented pressure positions, built-in check valve and automatic pressure release); Air conditioning; Eight front and three rear halogen lights; Speakers and antenna for radio installation (radio not included)

OPTIONS:


Block heater; Front and rear weights; Front PTO and front 3point hitch with quick-detach lower links, compatible with Zetor 260SLi front loader; Roof beacon (quick plug-in on flexible mount)



ZETOR system 260SLi

Front End Loader

High performance, quick-attach loader with self-leveling designed for Forterra 135 series tractor.

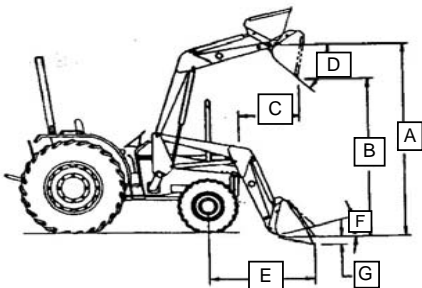

A	Maximum Lift Height (in.)	155
B	Clearance with Bucket Dumped (in.)	120
	Reach at Maximum Height (in.)	26
	Maximum Dump Angle (deg)	70
E	Reach on Ground (in.)	101
F	Bucket Rollback Angle (deg)	42
G	Digging Depth (in.)	3

Lift Capacity to Full Height (lb.):	- at pivot points	4 070
	- 31.5" ahead of pivot	2 750
Breakout Force (lb.):	- at pivot points	5 830
	- 31.5" ahead of pivot	3 800
Raising Time w/19 gpm Pump (sec)		5
Weight with 83" Bucket (lb.)		3 050